

# COAX diEci

**DCX 87.3 60W**




## Technical Specifications

Component	-	Two way coaxial
Woofer size	mm (in.)	87 (3.4)
Tweeter size	mm (in.)	15 (0.6)
Power handling	W peak	60
	W continuous	30
Impedance	$\Omega$	4
Frequency response	Hz	130 ÷ 21k
Sensitivity	dB SPL	92
Magnet size D-d-h	mm (in.)	60 x 24 x 8 (2.4 x 0.9 x 0.3)
Woofer voice coil $\varnothing$	mm (in.)	20 (0.8)
Woofer magnet	-	High density flux ferrite
Tweeter magnet	-	Neodymium
Woofer Cone	-	Water-repellent pressed paper
Tweeter dome	-	PEI
Weight of one component	kg (lb.)	0,31 (0.68)

1. Large motor assembly for mobile voice coil control.
2. Pure copper voice coil, wound on conex former, for maximum lightness.
3. Water-repellent treated paper cone.
4. Fabric surround, for wide excursion and resonance damping.
5. Neodymium tweeter with PEI dome, for compactness and energy at high frequencies.
6. DIN size basket protected by abrasion-proof dust paint.
7. Tin-plated, high current terminals.
8. Silver-plated lead wires for maximum reliability and conductivity.
9. Epoxy glue for basket and motor system provides perfect coupling.
10. Low carbon content plates for maximum magnetic permeability and high heat dissipation.

## Electro-Acoustic Parameters

D	mm	70
Xmax	mm	1,5
Re	$\Omega$	3,1
Fs	Hz	190
Le	mH @ 1 kHz	-
Le	mH @ 10 kHz	-
Vas	l	0,7
Mms	g	2,0
Cms	mm/N	0,35
BL	T·m	2,5
Qts	-	1
Qes	-	1,25
Qms	-	5,66
Spl	dB	92

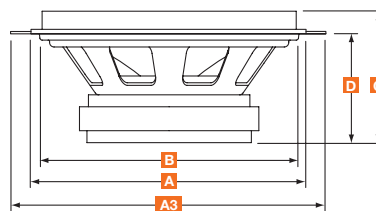

A	87 mm (3.4 in.)
A3	120 mm (4.7 in.)
B	81 mm (3.2 in.)
C	45 mm (1.8 in.)
D	34 mm (1.3 in.)