



## X 130


TWO WAY COAXIAL

160 W

1. Neodymium tweeter with PEI dome, for a brilliant reproduction of high frequencies and compactness.
2. Tweeter faceplate optimized for exceptional off-axis performance.
3. High stiffness metallic-grey finish pressed-paper cone with water-repellent treatment.
4. Foam surround combining high sensitivity and deep bass response.
5. Pure copper 25mm (1 in.) voice coil woofer for high dynamic power handling.
6. High flux density 70mm (2.76 in.) ferrite magnet for a powerful undistorted sound.
7. Easy-to-install DIN size basket protected by abrasion-resistant dust paint.

### TECHNICAL SPECIFICATIONS

<b>Component</b>	Two way coaxial	
<b>Size</b>		
Woofer	mm (in.)	130 (5)
Tweeter diaphragm	mm (in.)	24 (0.9)
<b>Voice Coil Ø</b>		
Woofer	mm (in.)	25 (1)
Tweeter	mm (in.)	14 (0.55)
<b>Power Handling</b>		
W peak	160	
W continuous	40	
<b>Sensitivity</b>	dB SPL	93
<b>Impedance</b>	Ω	4
<b>Frequency Response</b>	Hz	60 ÷ 21k
<b>Woofer Magnet size D x d x h</b>	mm (in.)	70 x 32 x 15 (2.76 x 1.26 x 0.59)
<b>Tweeter Magnet size D x d x h</b>	mm (in.)	13 x 1,5 (0.51 x 0.06)
<b>Weight of one speaker</b>	kg (lb.)	0,56 (1.23)
<b>Woofer Magnet</b>	High density flux ferrite	
<b>Tweeter Magnet</b>	Neodymium	
<b>Cone</b>	Water-repellent pressed paper	
<b>Dome</b>	PEI	
<b>Xmech</b>	mm (in.)	±3,5 (0.14)

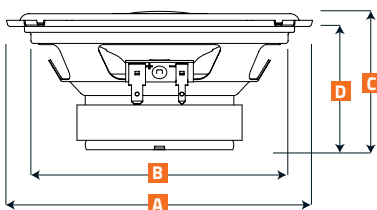

<b>A</b>	130 mm	5.12 in.
<b>B</b>	116 mm	4.57 in.
<b>C</b>	59 mm	2.32 in.
<b>D</b>	52 mm	2.05 in.